

Backlit Ring 1203 - Hanging

Grab attention from everyone at any event with the Formulate® Backlit Ring Hanging Structure 1203. This glowing structure mounts to the ceiling, and features a centered LED light within that makes messaging stand out. Simply zip the double-sided pillowcase fabric over the lightweight aluminum tube frame, which is 12' diameter and 3' tall for a convenient setup.



features and benefits:

- 12'Dia. x 3'H
- Constructed with 30mm (11/8") tubes and push-button connectors for simple assembly
- LED lighting is suspended in the middle of the structure
- Engineer certified (structural engineer certificate available upon request)
- Zipper pillowcase fabric graphic with bottom panel
- Comes with hanging cables
- Collapses to a fraction of its size and easy to store & ship
- Comes in a box or case

dimensions:

Hardware	Shipping
<p>Assembled unit:</p> <p>144" w x 36" h 3658mm(w) x 914.4mm(h)</p> <p>Approximate Weight: 100 lbs / 45.4 kg</p>	<p>Packaging - 1 Box: Shipping dimensions: 1x BOX: 16" L x 64" H x 16" D (406.4mm x 1626mm x 406.4mm)</p> <p>Approximate shipping weight: 110 lbs / 50 kg</p> <p>Packed in optional OCE2 Case: Shipping dimensions: 1 x BOX: 17" L x 64" H x 17" D 431.8mm(l) x 1626mm(h) x 431.8mm(d)</p> <p>Approximate shipping weight: 134 lbs / 61 kg</p>
<p>Graphics</p> <p>Graphic material: Backlit Textile (dye-sublimated fabric) or Intensity (UV printed)</p> <p>See graphic templates for graphic sizes.</p> <p>Refer to related graphic templates for more information Visit: https://www.theexhibitorshandbook.com/downloads/download-graphic-templates or click here</p>	<p>additional information:</p>

We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications

SET UP INSTRUCTIONS:

1. CONNECT BOTTOM AND TOP TUBES FOLLOWING THE LABELS
2. CONNECT SIDE TUBES
3. CLEAN THE FRAME AND PLACE THEM ON CLEAN PLACE
4. CAREFULLY REMOVE FABRIC COVER FROM BAG
5. PLACE COVER AROUND THE BOTTOM OF THE FRAME
6. PULL COVER CAREFULLY UP TO THE TOP
7. CLOSE ALL ZIPPERS
8. ADJUST FABRIC AROUND THE FRAME
9. CONNECT CABLE HARNESS TO THE EYEBOLTS
10. COMPLETELY TIGHTEN THREADED CONNECTORS

BREAK DOWN INSTRUCTIONS:




REVERSE SET-UP STEPS TO BREAKDOWN FRAME

FABRIC CARE INSTRUCTIONS:

1. UNZIP COVER ZIPPERS
2. CAREFULLY REMOVE FABRIC COVER
3. CLOSE ALL ZIPPERS
4. FOLD OR ROLL NEATLY
5. PLACE FABRIC IN COVER BAG

SET UP INSTRUCTIONS

REV.	DESCRIPTION	BY	DATE
A			7/11/24

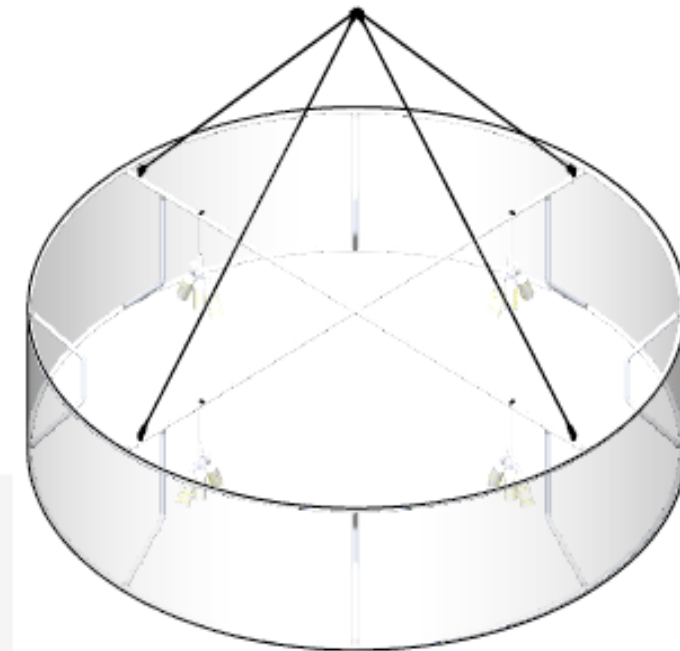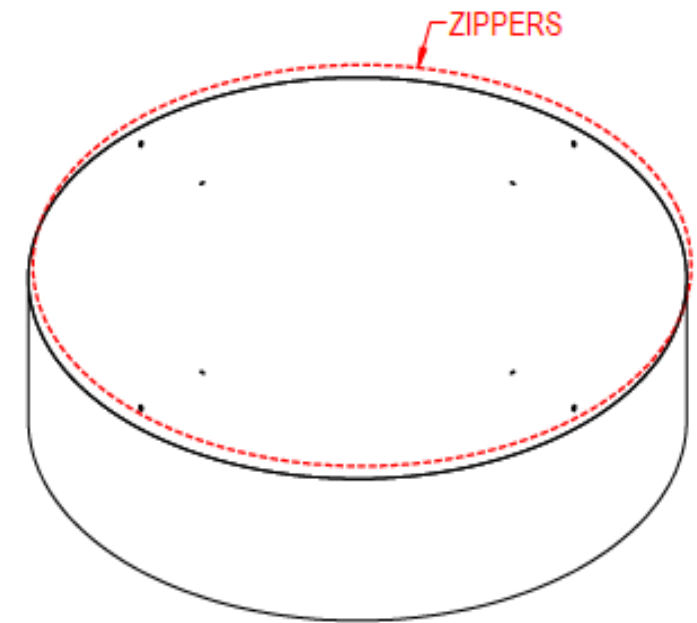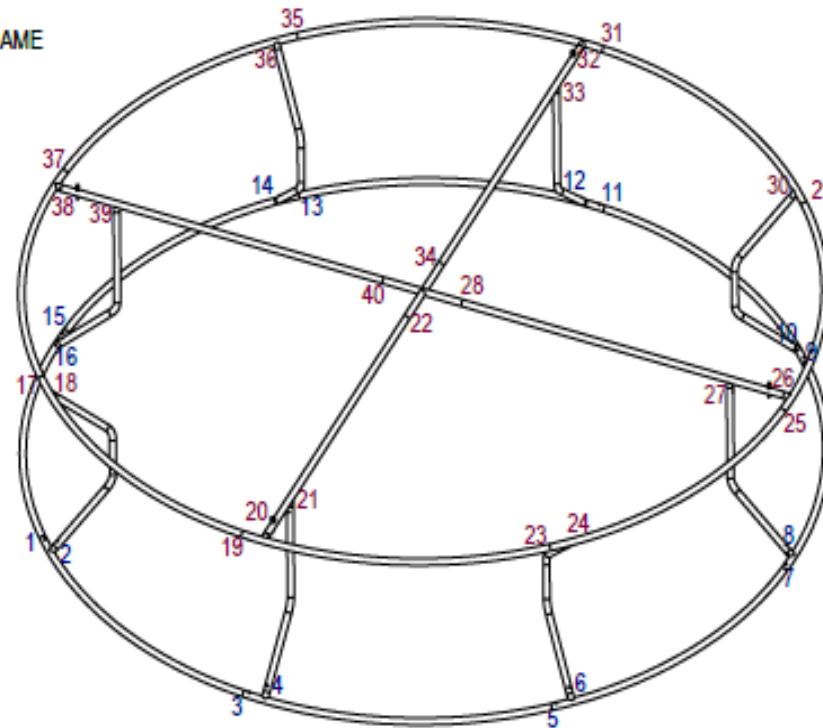

SWAGE WITH SNAP BUTTON CONNECTIONS

NOTE: TO BE USED ONLY ON 1.5" O.D. TUBES OR EQUIVALENT

NOTE: SWAGE MUST BE DONE TO THE END OF THE TUBE TO ENSURE A PROPER CONNECTION

ES30

SNAP ON BUTTON

TC-30-C


EYEBOLT TO TUBE

WIRE CABLES

LIGHT SET UP INSTRUCTIONS:

10' Socket Cord


24W

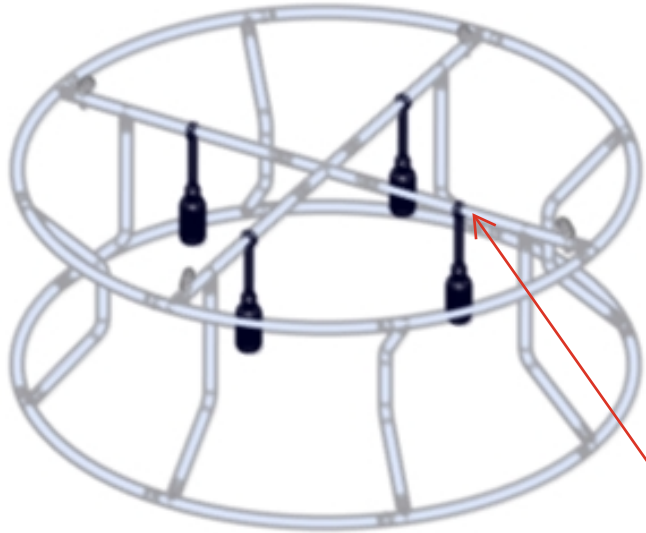

TUBE CORD CLIP



TO POWER SUPPLY

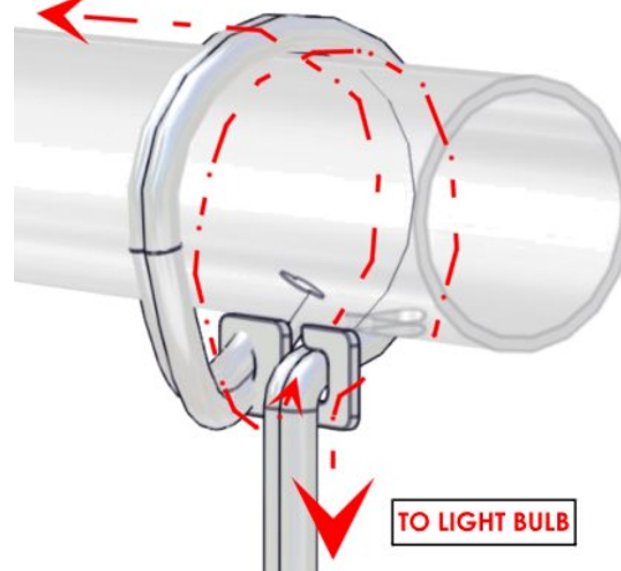

CORD WRAPS AROUND TUBE

TO LIGHT BULB

