


# Backlit Square 1003 - Hanging

Bring attention to your exhibit with the Formulate® Backlit Square Hanging Structure 1003. This hanging display mounts to the ceiling and features a pillowcase fabric graphic that fits over the lightweight aluminum tube frame. Graphics are enhanced by LED lighting, placed in the center of the 10' wide by 3' tall structure, for an evenly distributed glow.

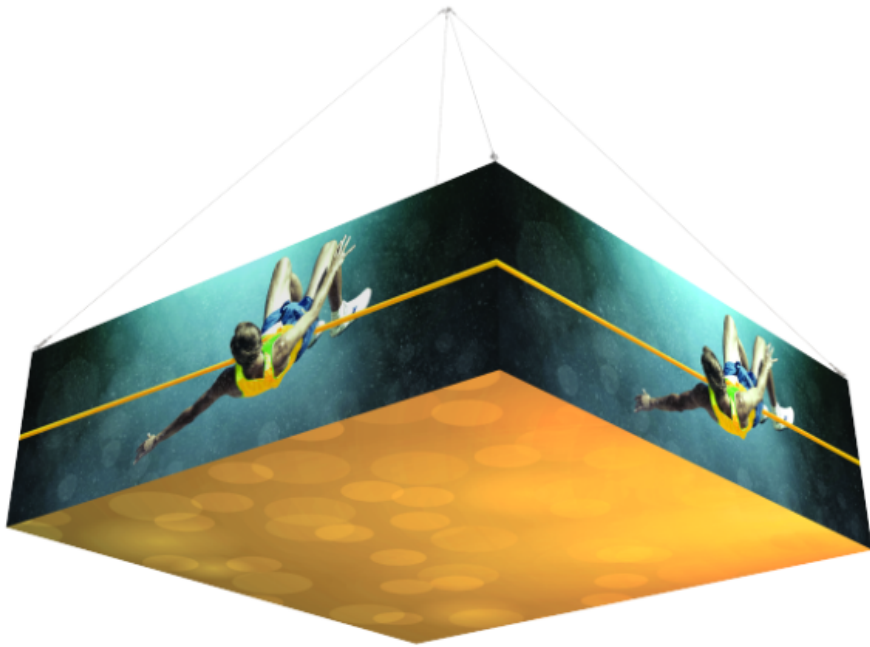

## features and benefits:

- 10'W x 10'L x 3'H
- Constructed with 30mm (1 1/8") tubes and push-button connectors for simple assembly
- LED lighting is suspended in the middle of the structure
- Engineer certified (structural engineer certificate available upon request)
- Zipper pillowcase fabric graphic with bottom panel
- Comes with hanging cables
- Collapses to a fraction of its size and easy to store & ship
- Comes in a box or case

## dimensions:

### Hardware

Assembled unit:

120" w x 36" h x 120" d  
3048mm(w) x 914.4mm(h) x 3048mm(d)

Approximate Weight:  
116 lbs / 53 kg

### Graphics

Graphic material: Backlit Textile (dye-sublimated fabric) or Intensity (UV printed)

See graphic templates for graphic sizes.

Refer to related graphic templates for more information Visit:

<https://www.theexhibitorshandbook.com/downloads/download-graphic-templates>  
or click here

### Shipping

#### Packaging - 1 Box:

Shipping dimensions:  
1x BOX: 16" L x 52" H x 16" D  
(406.4mm x 1320mm x 406.4mm)

Approximate shipping weight:  
126 lbs / 57 kg

#### Packed in optional OCE2 Case:

Shipping dimensions:  
1 x BOX: 17" L x 52" H x 17" D  
431.8mm(l) x 1320mm(h) x 431.8mm(d)

Approximate shipping weight:  
150 lbs / 68 kg

## additional information:

We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications

## SET UP INSTRUCTIONS:



1. CONNECT BOTTOM AND TOP TUBES FOLLOWING THE LABELS
2. CONNECT SIDE TUBES
3. CLEAN THE FRAME AND PLACE THEM ON CLEAN PLACE
4. CAREFULLY REMOVE FABRIC COVER FROM BAG
5. PLACE COVER AROUND THE BOTTOM OF THE FRAME
6. PULL COVER CAREFULLY UP TO THE TOP
7. CLOSE ALL ZIPPERS
8. ADJUST FABRIC AROUND THE FRAME
9. CONNECT CABLE HARNESS TO THE EYEBOLTS
10. COMPLETELY TIGHTEN THREADED CONNECTORS

## BREAK DOWN INSTRUCTIONS:

REVERSE SET-UP STEPS TO BREAKDOWN FRAME

## FABRIC CARE INSTRUCTIONS:

1. UNZIP COVER ZIPPERS
2. CAREFULLY REMOVE FABRIC COVER
3. CLOSE ALL ZIPPERS
4. FOLD OR ROLL NEATLY
5. PLACE FABRIC IN COVER BAG

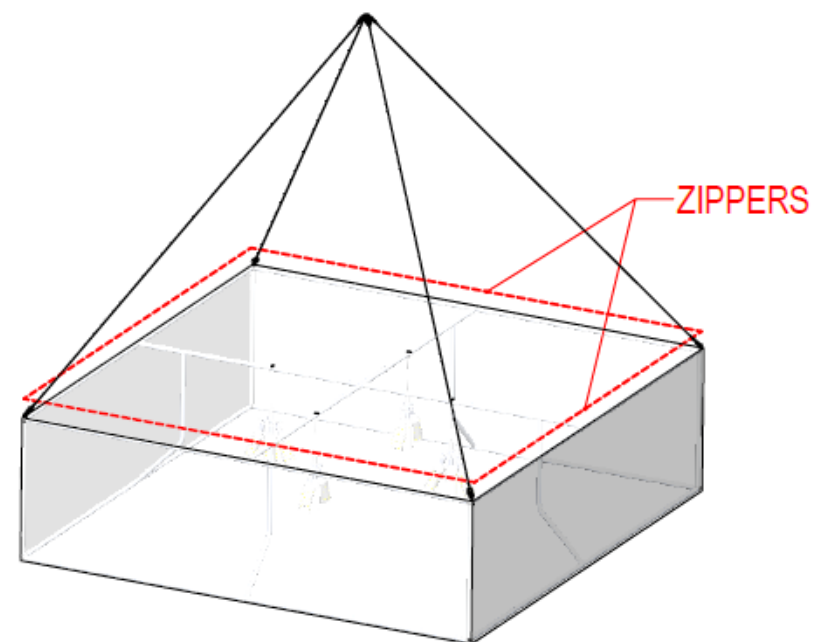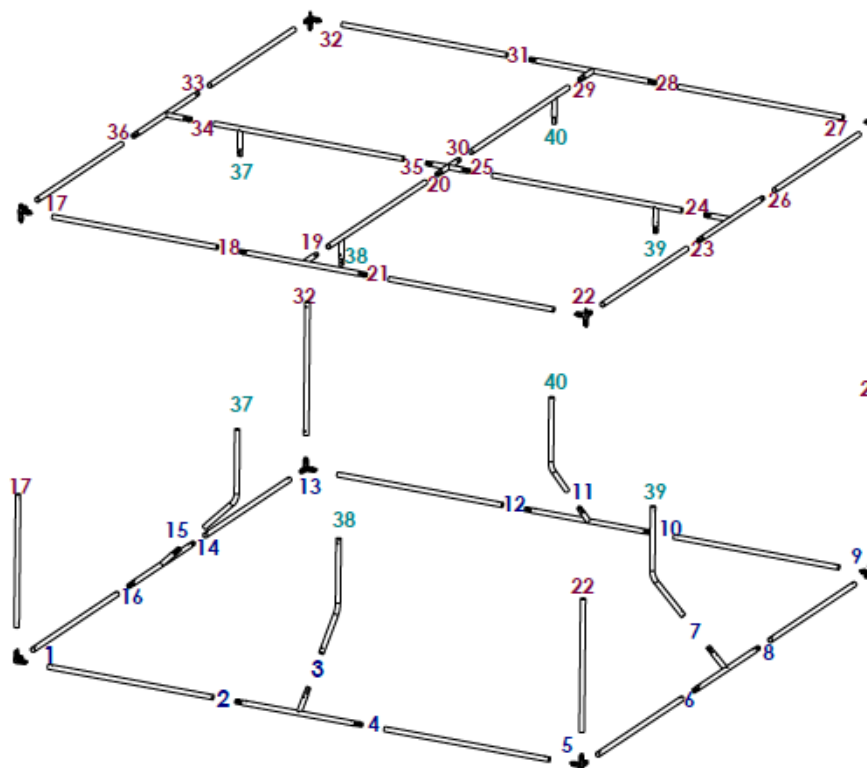

TC-30-3W

TC-30-3W W/ EYEBOLT

ES30

ES30

WIRE  
CABLES

SNAP ON  
BUTTON



SNAP ON  
BUTTON

**LIGHT SET UP INSTRUCTIONS:**

10' Socket Cord

3 Socket Light Fixture


24W

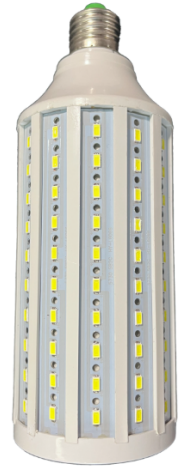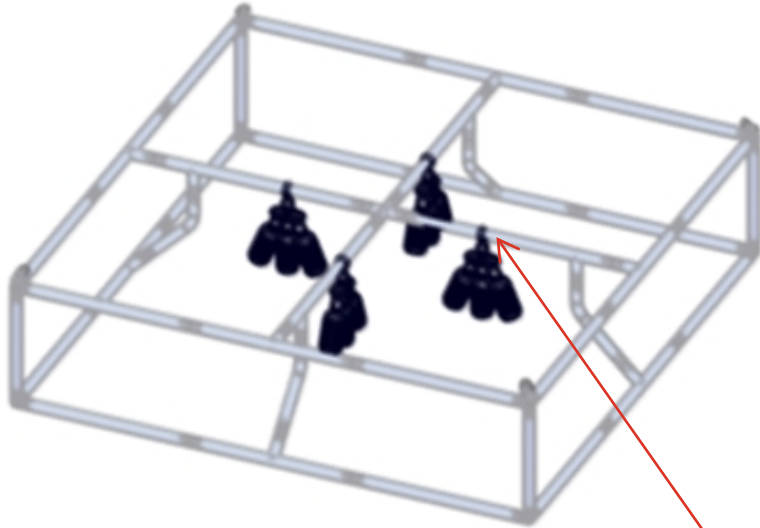

**TUBE CORD CLIP**



**TO POWER SUPPLY**

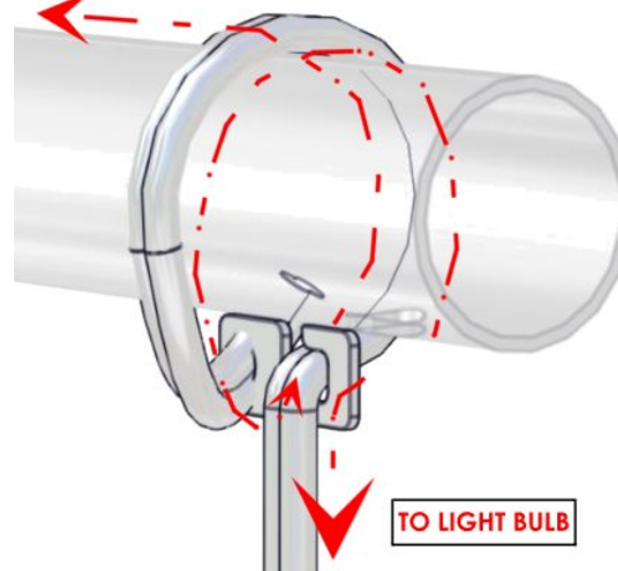

**CORD WRAPS AROUND TUBE**

**TO LIGHT BULB**

